
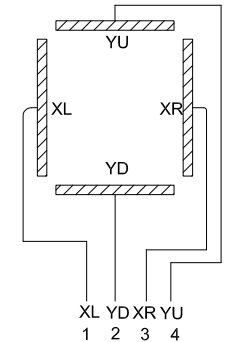
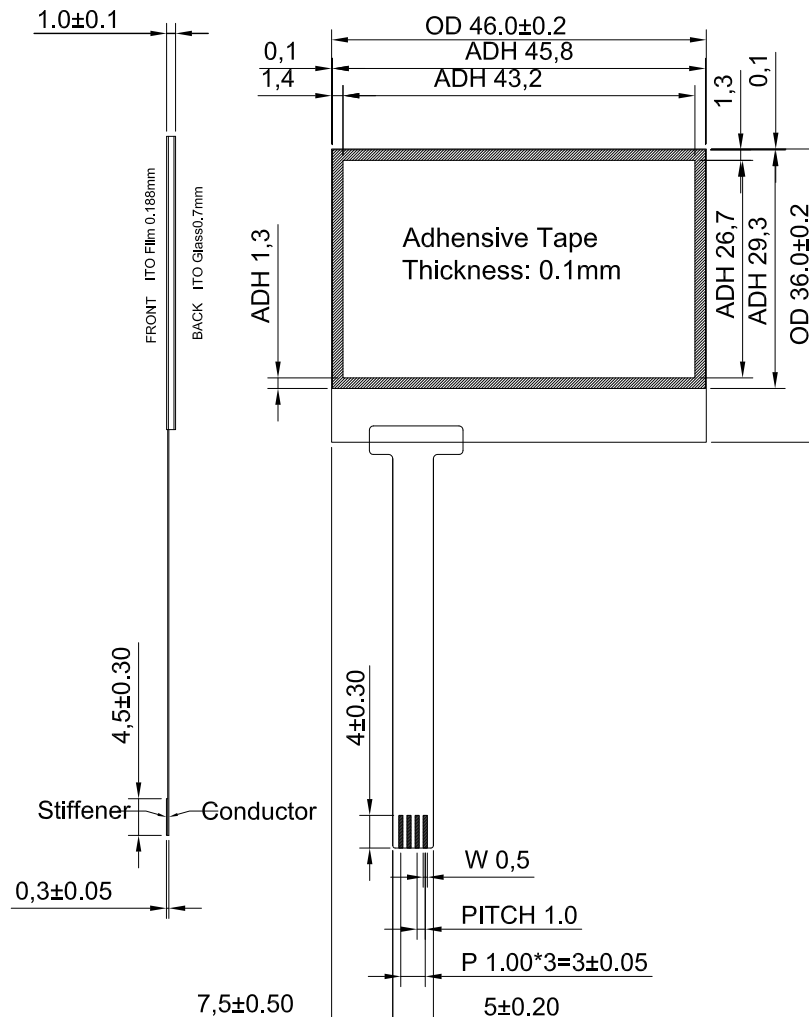


Customer Approved by:


REV	DESCRIPTION	DESIGN	DATE
A	1'ST DEGIN	JAVEN	Jul-31-2014
B			

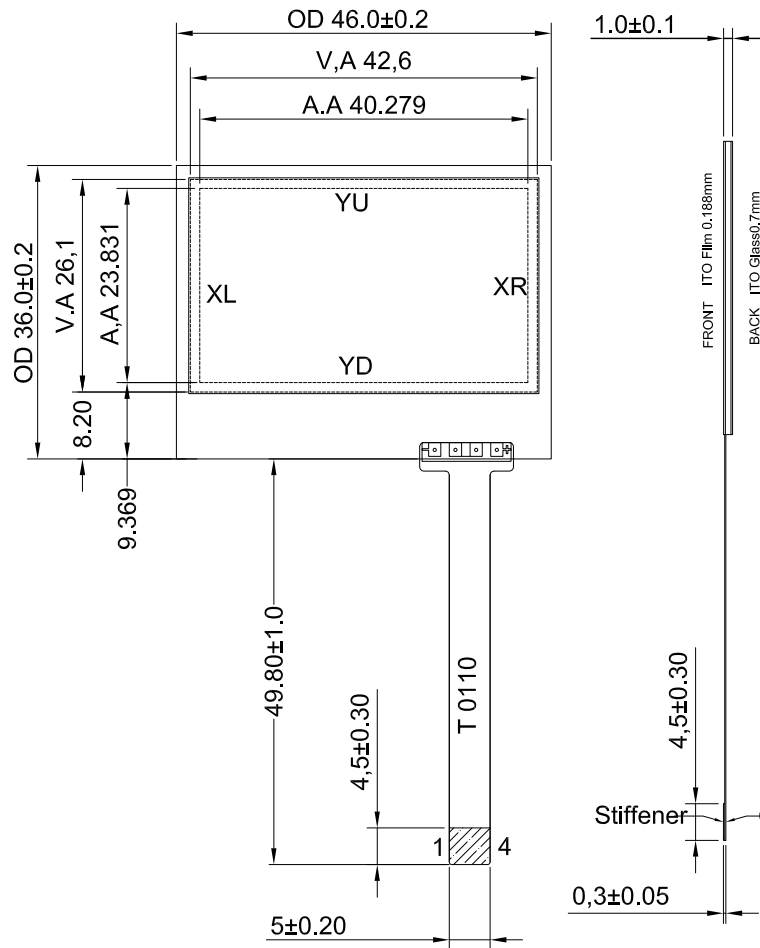

Circuit Diagram

NO.	SYMBOL
1	XL
2	YD
3	XR
4	YU

- Note:
- Structure: film+glass+FPC
Film: Bright screen (0.188mm)
Glass: 500Ω/□ (0.7mm)
Tail: FPC (pitch=1.0mm)
Thickness: 1.0±0.15mm
 - Operating voltage: 3.0V
 - Voltage: DC3V 1mA
 - Insulation resistance: ≥20MΩ(25V DC)
 - Linearity: ≤1,5%
 - Transmittance: ≥85%
 - Operation force: 10-100g
 - Life time: ≥1,000,000次
 - Operating temp: -10℃~+60℃, ≤90%RH
 - Storage temp: -20℃~+70℃, ≤90%RH
 - Tolerance±0.20



深圳旭日东方科技有限公司

EASTRISING TECHNOLOGY CO.,LTD

TEL:86-755-33503874 FAX:86-755-33507642-801

APPROVALS		DATE	MODEL NUMBER :	PROJECTION	GENERAL TOL.		UNITS
APP	CHK				ER-TP018-1	SCALE:	N.T.S.
DWN	JIM		DO NOT SCALE THIS DRAWING.		SHEET:	1	