
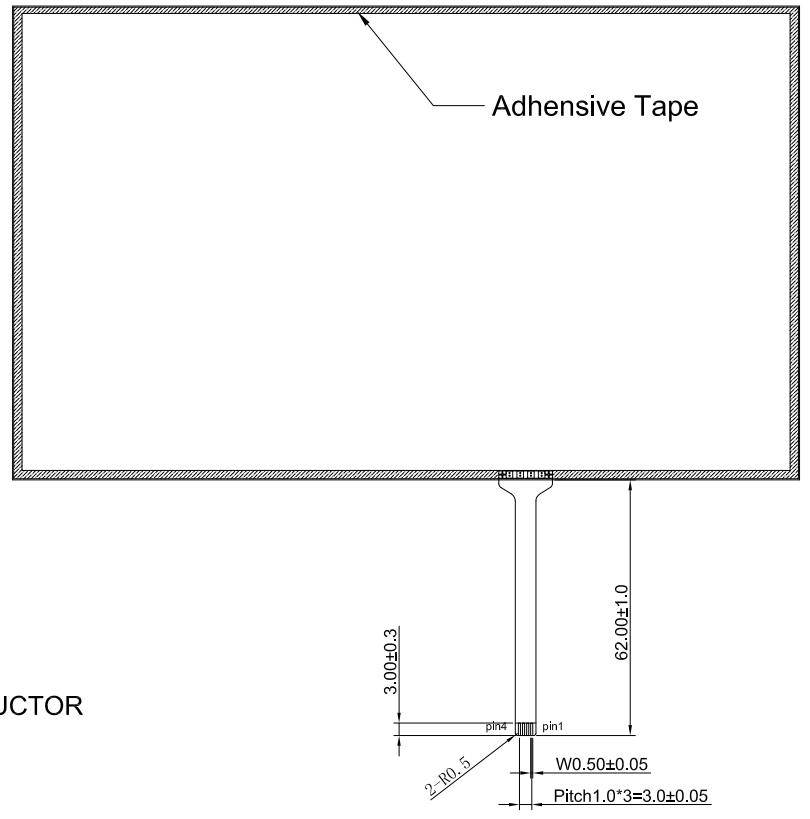
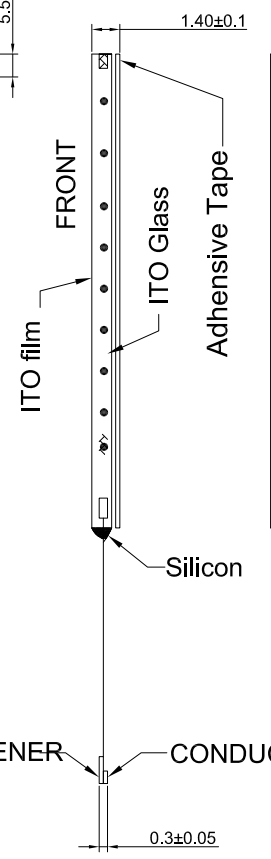


|      |             |              |            |
|------|-------------|--------------|------------|
| 7    | 8           | 9            | 10         |
| Item | Content     | Date         | Checked By |
| 1    | NEW DRAWING | June-21-2014 | Mr.Jim     |

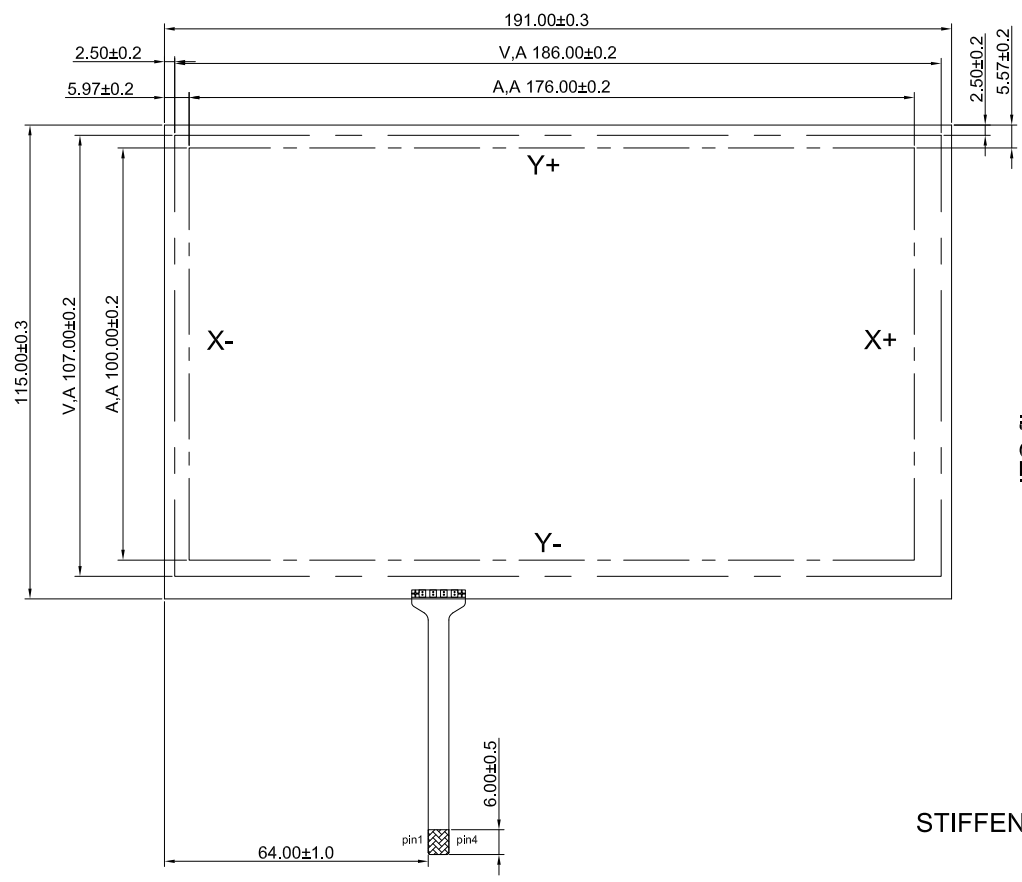

- Note:
- Structure: film+glass+FPC  
Film: Bright screen (0.188mm)  
Glass: 500Ω/□ (1.1mm)  
Tail: FPC (pitch=1.0mm)
  - Operating voltage: 5.0V
  - Voltage: DC5V 1mA
  - Insulation resistance: ≥20MΩ(25V DC)
  - Linearity: ≤1.5%
  - Transmittance: ≥75%
  - Operation force: 20-100g
  - Life time: ≥1,000,000
  - Operating temp: -10°C~+60°C, ≤90%RH
  - Storage temp: -20°C~+70°C, ≤90%RH
  - X: 400-950Ω Y: 100-500Ω
  - Tolerance ±0.20

| PIN | OUT |
|-----|-----|
| 1   | X-  |
| 2   | Y-  |
| 3   | X+  |
| 4   | Y+  |

|   |  |  |
|---|--|--|
| <br><b>EastRising</b><br><small>buydisplay.com</small> | <b>EastRising Technology Co.,Ltd</b><br>旭日东方科技有限公司 |  CD |
|   |  | UNIT: MM    SIZE: A4<br>SHEET: 1 OF 1  |
| PART NUMBER: ER-TP080-1   |  | REV: A0  |
| DRAWN BY :JIM   | CHECKED BY :                                       | APPROVED BY :  |